


HOT ROLLED ANCHOR BARS

(500/550 & 555/700)



diameter	cross-sectional area A	weight	min. yield strength Re	min. tensile strength Rm	load at yield Re	ultimate load Rm
[mm]	[mm ²]	[kg/m]	[N/mm ²]	[N/mm ²]	[kN]	[kN]
16L	201	1,58	500	550	101	111
20L	314	2,47	500	550	157	173
25L	491	3,85	500	550	245	270
28L	616	4,83	500	550	308	339
32L	804	6,31	500	550	402	442
40L	1.257	9,86	500	550	628	691
50L	1.963	15,41	500	550	982	1.080
57,5L	2.597	20,38	555	700	1.441	1.818
63,5L	3.167	24,86	555	700	1.758	2.217
75L	4.418	34,68	500	550	2.209	2.430

› Steelgrade '500/550' & '555/700' › HRAB's are also available with double corrosion protection (DCP)

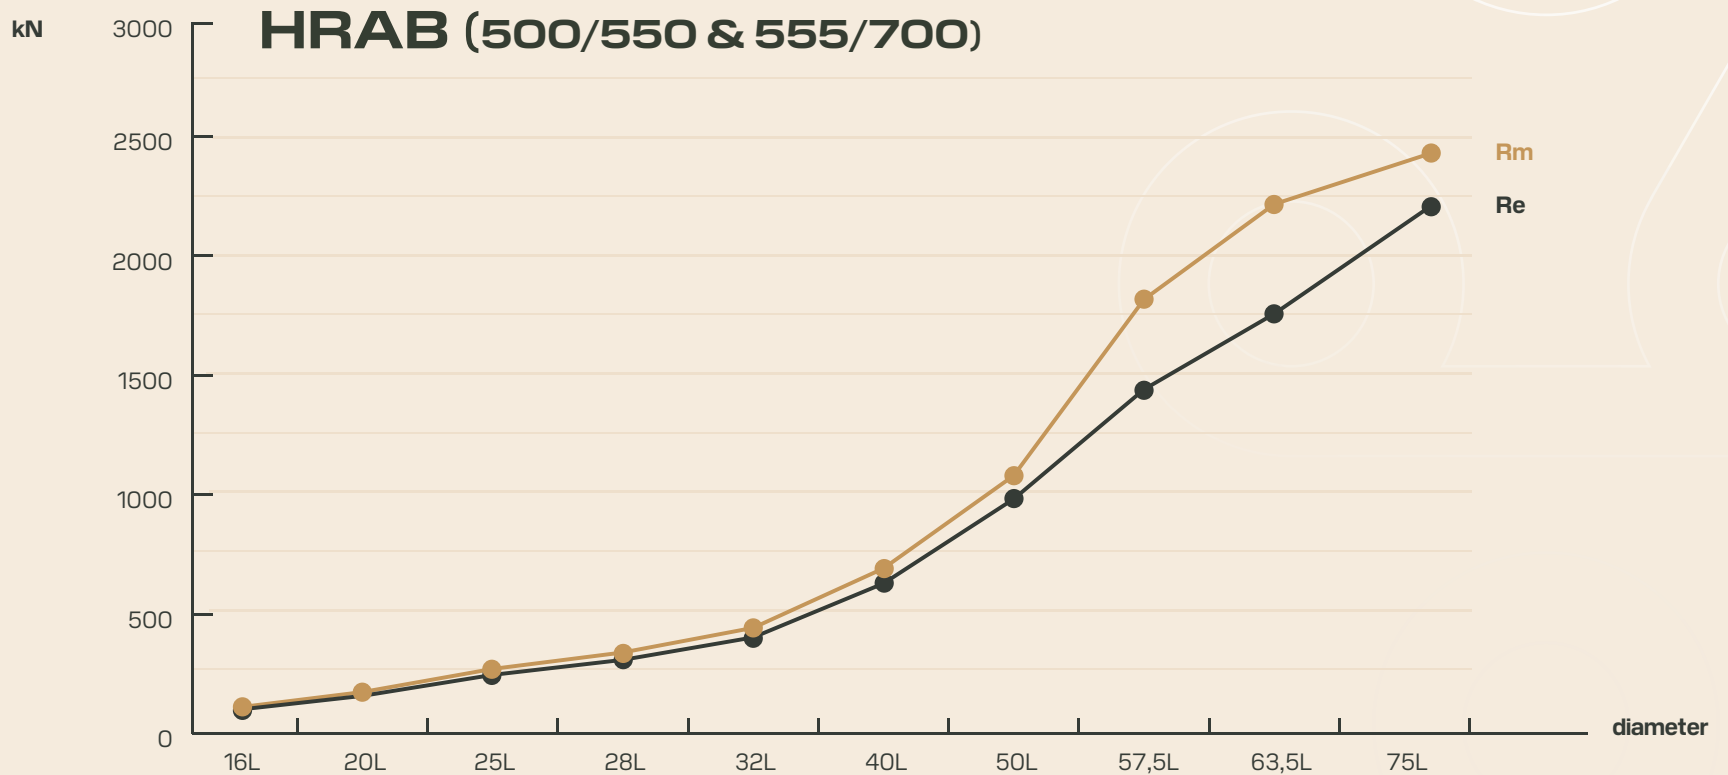

The given data is only indicative and no further rights can be derived from it.